

FLASHING
N.T.S.

11

APPLY 10mm [$\frac{3}{8}$ "] FLAT BEAD OF SEALANT AROUND PRE-DRILLED HOLES FOR SCREWS.


10

APPLY 10mm [$\frac{3}{8}$ "] CONTINUOUS FLAT BEAD OF SEALANT ON UNDERSIDE OF FLASHING AT BOTH SIDE OF FLASHING.

9

APPLY 10mm [$\frac{3}{8}$ "] CONTINUOUS FLAT BEAD OF SEALANT ON UNDERSIDE OF FLASHING AT EACH END OF FLASHING.


10mm [$\frac{3}{8}$ "]
5mm [$\frac{3}{16}$ "]

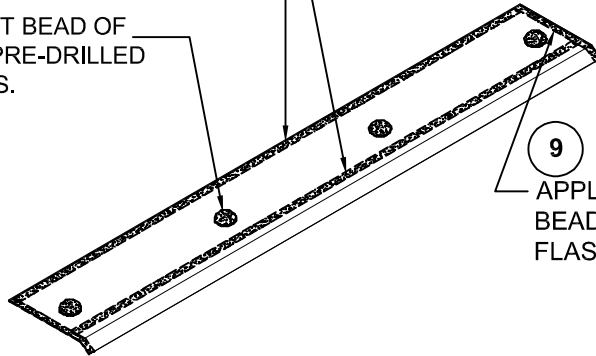

16 GA GALVANIZED FLASHING WITH PREDRILLED HOLES FOR SCREWS AT 50mm [2"] FROM INSIDE FACE OF FLASHING.

11

SEALANT AROUND HOLES FOR SCREWS.

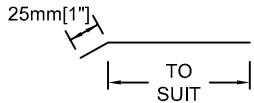

SILL SECTION

13

APPLY 6mm [$\frac{1}{4}$ "] CONTINUOUS CORNER BEAD 6mm [$\frac{1}{4}$ "] OF SEALANT AT UNDERSIDE OF FLASHING.

20mm [$\frac{3}{4}$ "]

50mm [2"]

10

CONTINUOUS FLAT BEAD OF SEALANT ON UNDERSIDE OF FLASHING.

12

SECURE FLASHING WITH FLAT HEAD CONCRETE SCREW AT 50mm [2"] FROM EACH END AND 333mm [1'-1 $\frac{1}{8}$ "] o/c MAX.

CONCRETE WALL WITH CONFORM.

**CONFORM WALL OPENING
-SILL FLASHING**

- DETAIL FOR FORMWORK ONLY
- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
100 Galcat Drive, Unit #2,
Woodbridge, Ontario, Canada L4L 0B9
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com



DRAWING NO.	
A093	
COPYRIGHT 2024	
SCALE:	REVISION No.:
	R00