


## HEADER SECTION

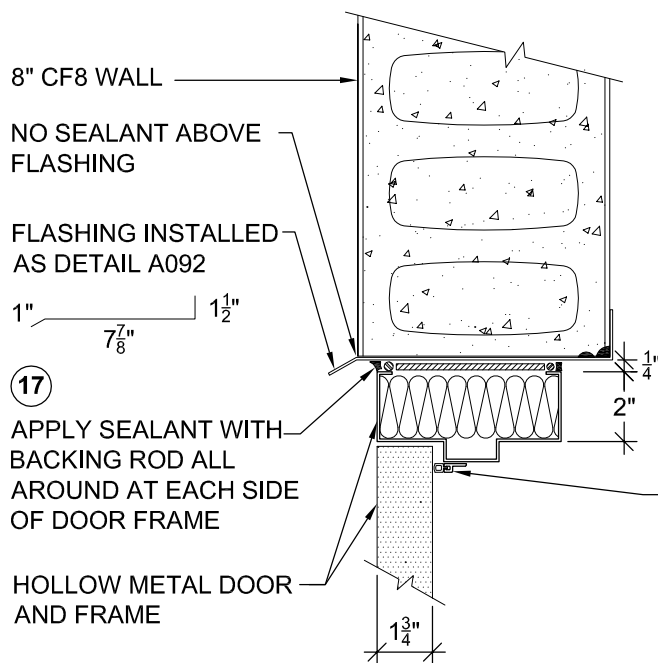

## OPENING


- 14
- APPLY 1/4" CORNER BEAD OF SEALANT AT TOP OF STARTER TO FLASHING AT HEADER OF OPENING.

## JAMB SECTION


UNCORED CONFORM STARTER INSTALLED AS DETAIL A090

- 15
- INSTALL SHIMS TO CENTRE DOOR FRAME IN ROUGH OPENING

- 16
- FASTEN FRAME WITH 3/8"  $\phi$  x 5" FLATHEAD EXPANSION ANCHOR BOLTS. (3 PER JAMB)

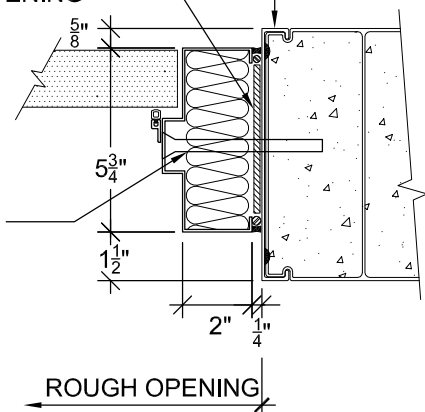

## SILL SECTION

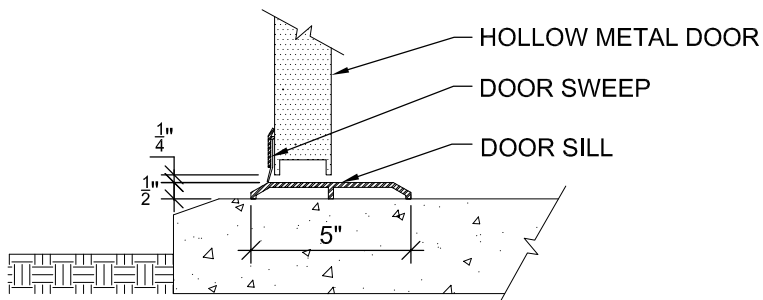

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.

## 8" CF8 WALL - HOLLOW METAL DOOR EXTERIOR



Nuform Building Technologies Inc.  
1 Regalcrest Court,  
Woodbridge, Ontario, Canada L4L 8P3  
Tel: 905-652-0001 Fax: 905-652-0002  
Toll Free: 1-877-747-9255  
Web Page: www.nuformdirect.com

DRAWING NO.

A123

COPYRIGHT 2008

SCALE:

2":1'

REVISION No.:

R00