



HEADER SECTION

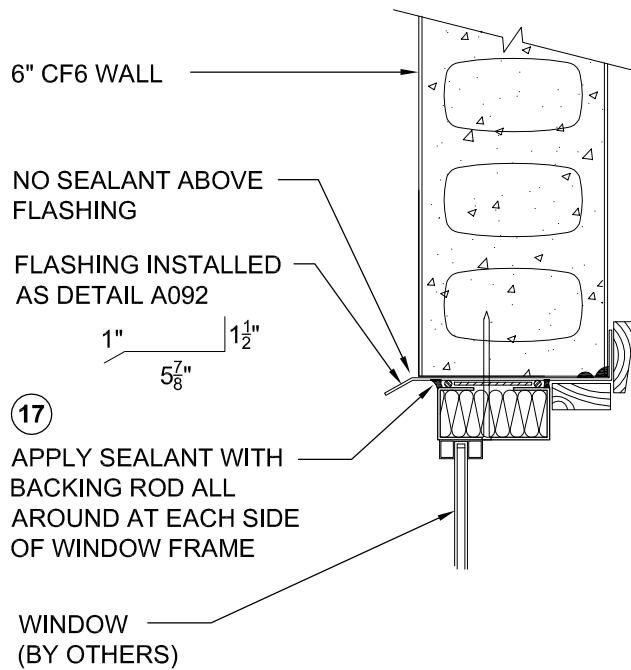

OPENING


- 14 APPLY 1/4" CORNER BEAD OF SEALANT AT TOP AND BOTTOM OF STARTER TO FLASHING AT HEADER AND SILL OF OPENING.




JAMB SECTION

UNCORED CONFORM STARTER INSTALLED AS DETAIL A091

- 15 ANCHOR WINDOW AS REQUIRED BY WINDOW MANUFACTURER



SILL SECTION

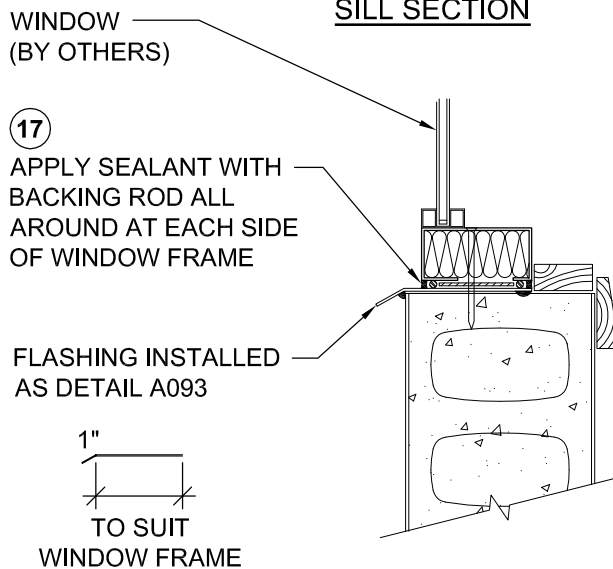

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.

6" CF6 WALL - HOLLOW METAL WINDOW



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com



DRAWING NO.

A222

COPYRIGHT 2008

SCALE:

2":1'

REVISION No.:

R00