



## HEADER SECTION

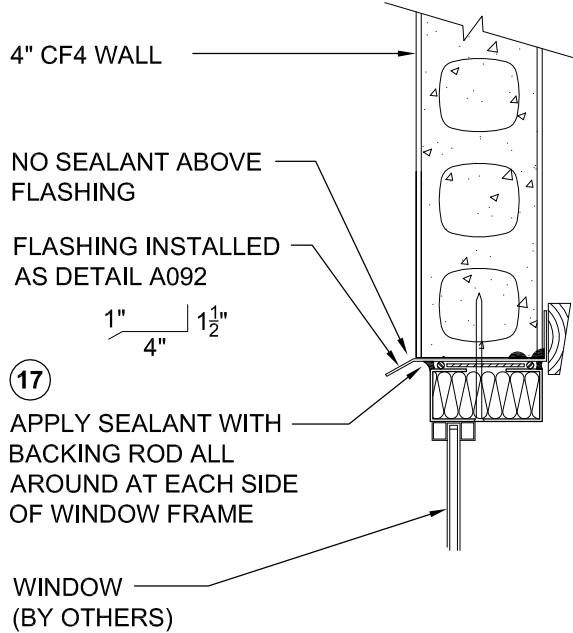

## OPENING

14

APPLY  $\frac{1}{4}$ " CORNER BEAD OF SEALANT AT TOP AND BOTTOM OF STARTER TO FLASHING AT HEADER AND SILL OF OPENING.




## JAMB SECTION


UNCORED CONFORM STARTER INSTALLED AS DETAIL A091

15

ANCHOR WINDOW AS REQUIRED BY WINDOW MANUFACTURER



## SILL SECTION

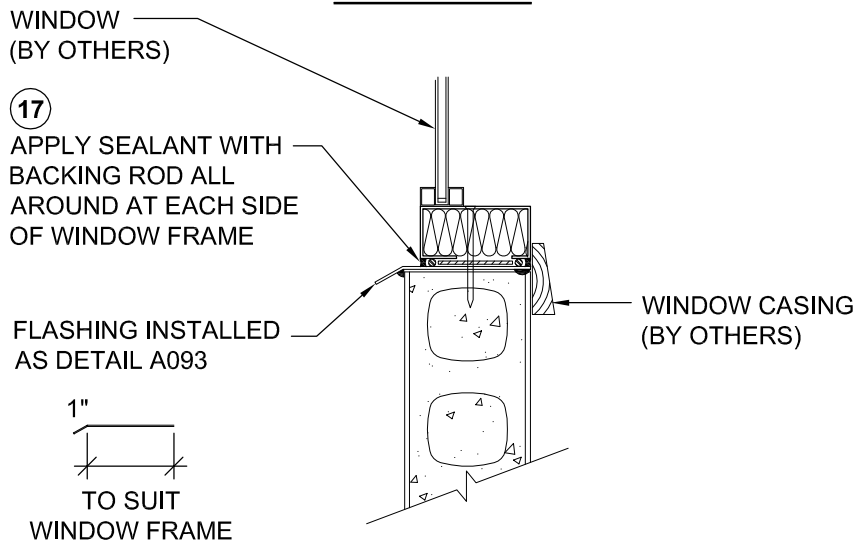

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.  
1 Regalcrest Court,  
Woodbridge, Ontario, Canada L4L 8P3  
Tel: 905-652-0001 Fax: 905-652-0002  
Toll Free: 1-877-747-9255  
Web Page: www.nuformdirect.com

4" CF4 WALL -  
HOLLOW METAL WINDOW



DRAWING NO.

A221

COPYRIGHT 2008

SCALE:

2":1'

REVISION No.:

R00