


OPENING
N.T.S.




- 2 INSTALL EXTERIOR LEG OF STARTER HOOKED INTO PANEL GROOVE, AND INTERIOR LEG OF STARTER IS SNAPPED INTO PLACE USING RUBBER MALLET. (DO NOT SLIDE STARTER IN PLACE).

- 1 APPLY $\frac{3}{8}$ " FLAT BEAD OF SEALANT FULL HEIGHT TO EACH SIDE OF STARTER.

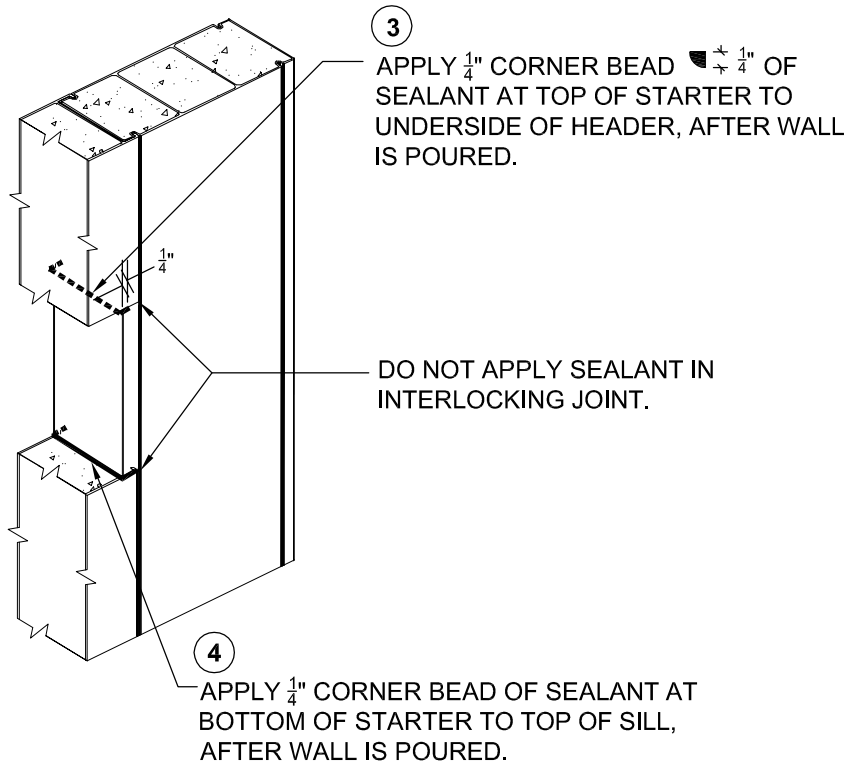

CONCRETE WALL WITH CONFORM

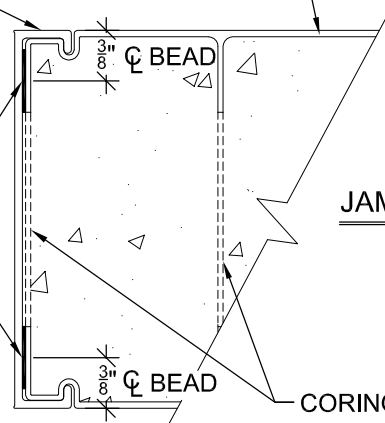

JAMB SECTION

CORING



- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

CONFORM WALL OPENING CONFORM STARTER AT WINDOW JAMB



DRAWING NO.

A091

COPYRIGHT 2008

SCALE:

4":1'

REVISION No.:

R00