



PLACEMENT HOOP
#12 WIRE x $5\frac{1}{8}" \phi$



REINFORCED AT
CENTERLINE OF
CONCRETE

$1\frac{1}{2}"$ CONCRETE
COVER TYPICAL

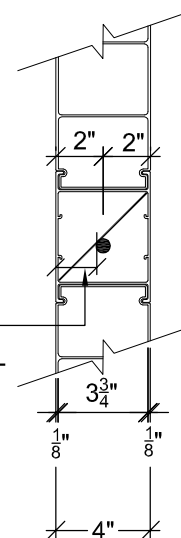

NOTES:

- 1- PROVIDE WIRE HOOPS AT 10'-0" O/C MAX.
- 2- MINIMUM 2 HOOPS PER VERTICAL BAR
- 3- HOOPS ARE TACK WELDED OR TIE WIRED TO VERTICAL BARS AS REQUIRED
- 4- PLACE ALL VERTICAL BARS IN BOX CONNECTORS WHERE POSSIBLE

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

4" CF4 WALL - VERTICAL REINFORCING BARS



DRAWING NO.

T041

COPYRIGHT 2008

SCALE:

$1\frac{1}{2}":1'$

REVISION No.:

R00