


OPENING  
N.T.S.

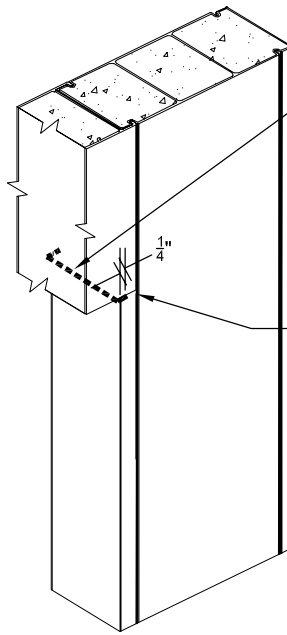


③  
APPLY  $\frac{1}{4}$ " CORNER BEAD  $\frac{1}{4}$ " OF SEALANT AT TOP OF STARTER TO UNDERSIDE OF HEADER, AFTER WALL IS POURED.

DO NOT APPLY SEALANT IN INTERLOCKING JOINT.

②  
INSTALL EXTERIOR LEG OF STARTER HOOKED INTO PANEL GROOVE, AND INTERIOR LEG OF STARTER IS SNAPPED INTO PLACE USING RUBBER Mallet. (DO NOT SLIDE STARTER IN PLACE).

①  
APPLY  $\frac{3}{8}$ " FLAT BEAD  $\frac{3}{16}$ " OF SEALANT FULL HEIGHT TO EACH SIDE OF STARTER.

CONCRETE WALL WITH CONFORM

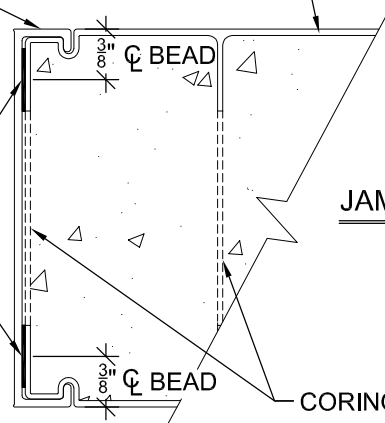

JAMB SECTION

CORING



- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.  
1 Regalcrest Court,  
Woodbridge, Ontario, Canada L4L 8P3  
Tel: 905-652-0001 Fax: 905-652-0002  
Toll Free: 1-877-747-9255  
Web Page: www.nuformdirect.com

## CONFORM WALL OPENING CONFORM STARTER AT DOOR JAMB



DRAWING NO.

A090

COPYRIGHT 2008

SCALE:

4":1'

REVISION No.:

R00