



HEADER SECTION

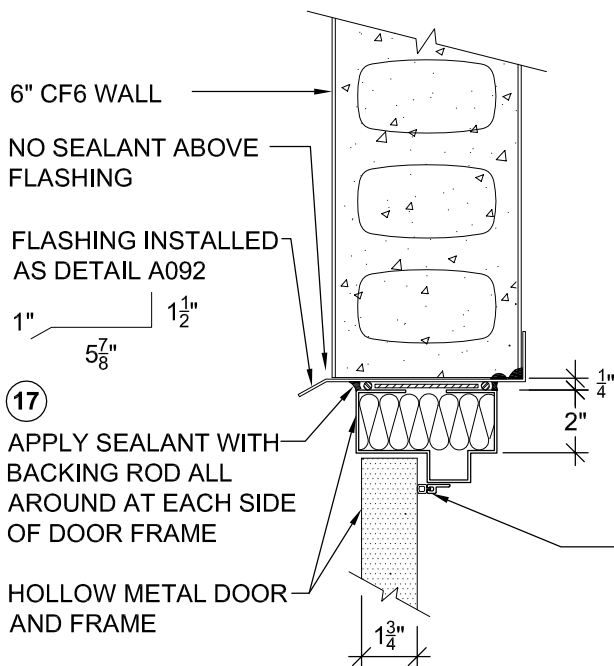

14

APPLY $\frac{1}{4}$ " CORNER BEAD OF SEALANT AT TOP OF STARTER TO FLASHING AT HEADER OF OPENING.

OPENING



WEATHERSTRIP

JAMB SECTION


UNCORED CONFORM STARTER INSTALLED AS DETAIL A090

15


INSTALL SHIMS TO CENTRE DOOR FRAME IN ROUGH OPENING

16

FASTEN FRAME WITH $\frac{3}{8}$ " ϕ 5" FLATHEAD EXPANSION ANCHOR BOLTS. (3 PER JAMB)

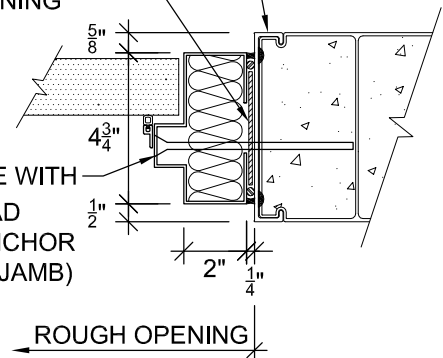

SILL SECTION

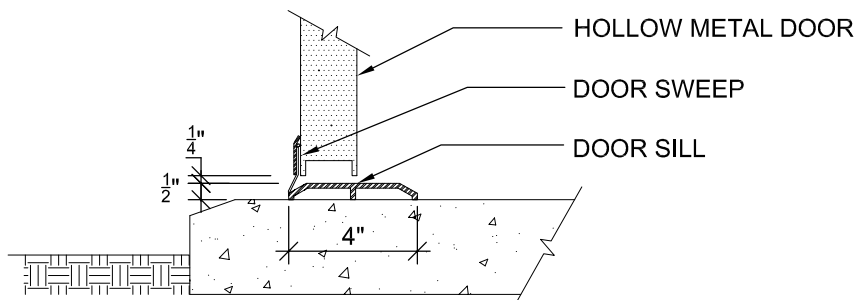

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.

6" CF6 WALL -
HOLLOW METAL DOOR
EXTERIOR



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

DRAWING NO.

A122

COPYRIGHT 2008

SCALE:

2":1'

REVISION No.:

R00