



HEADER SECTION

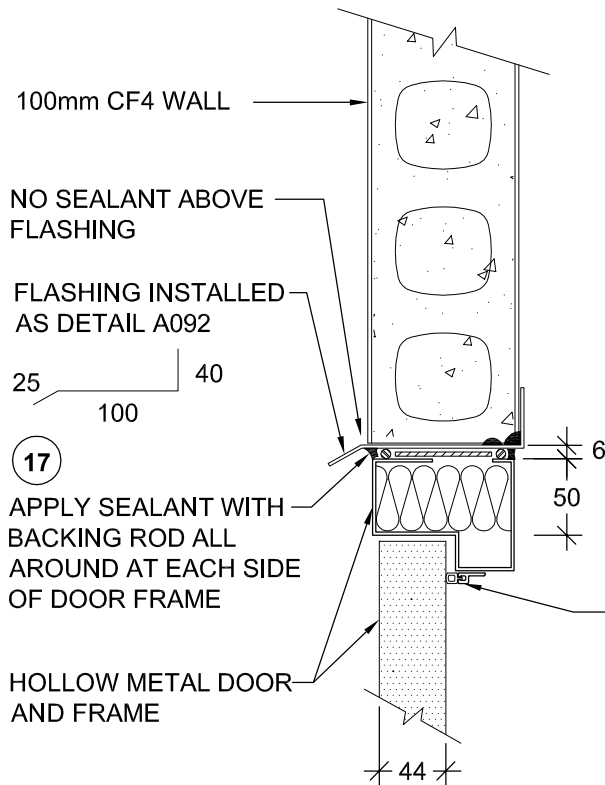

OPENING

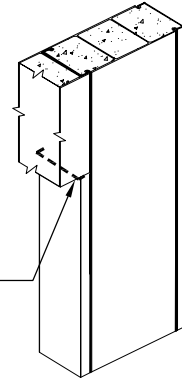

14

APPLY 6mm CORNER BEAD OF SEALANT AT TOP OF STARTER TO FLASHING AT HEADER OF OPENING.

WEATHERSTRIP

JAMB SECTION


UNCORED CONFORM STARTER INSTALLED AS DETAIL A090

15

INSTALL SHIMS TO CENTRE DOOR FRAME IN ROUGH OPENING


16

FASTEN FRAME WITH 9.5φx127 FLATHEAD EXPANSION ANCHOR BOLTS. (3 PER JAMB)

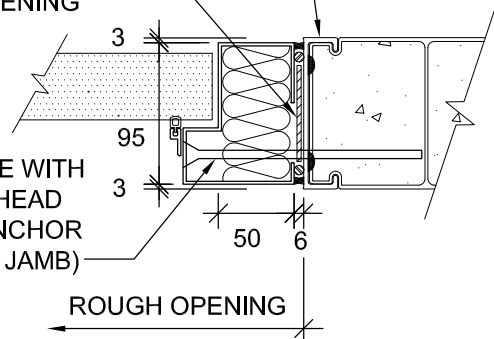

ROUGH OPENING

SILL SECTION

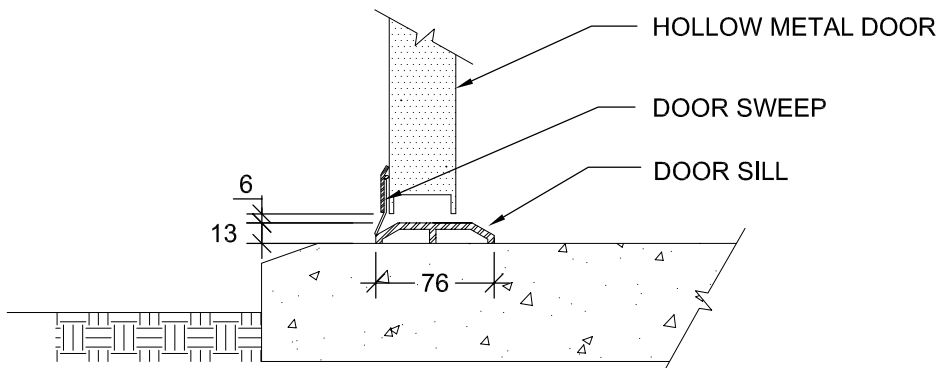

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

100mm CF4 WALL-
HOLLOW METAL DOOR
EXTERIOR



DRAWING NO.

A121

COPYRIGHT 2008

SCALE:

1:5

REVISION No.:

R00