



## HEADER SECTION

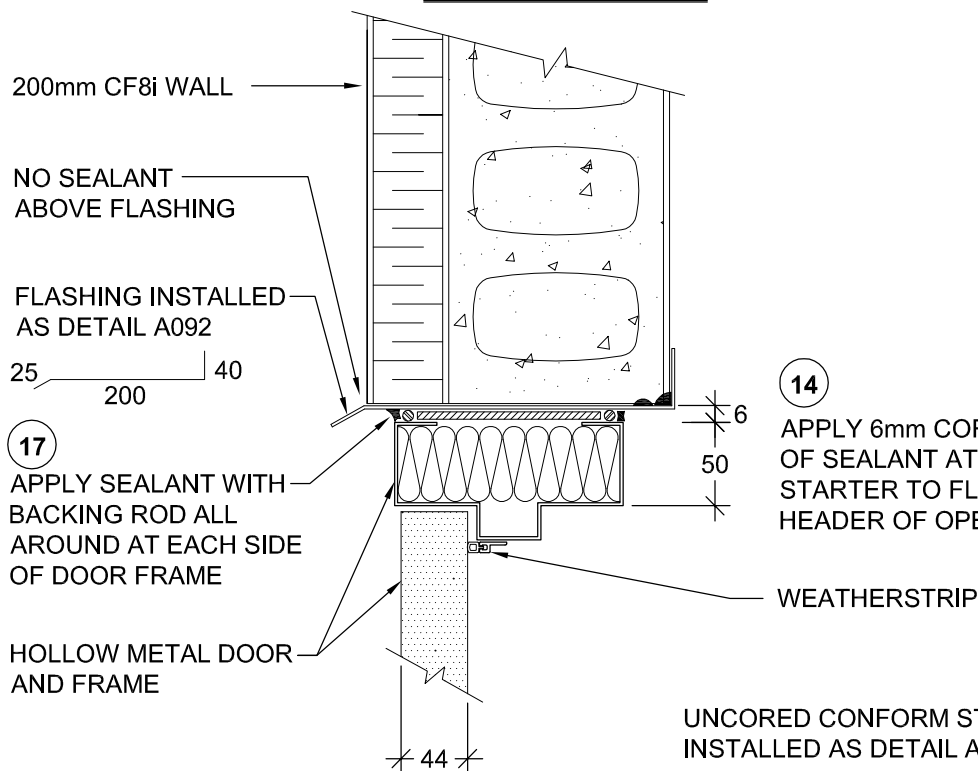

## OPENING

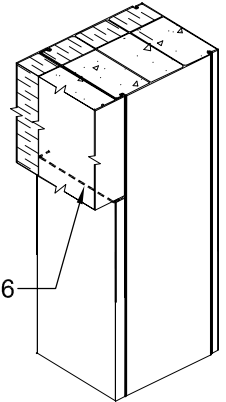

**14** APPLY 6mm CORNER BEAD OF SEALANT AT TOP OF STARTER TO FLASHING AT HEADER OF OPENING.

## WEATHERSTRIP


## JAMB SECTION

UNCORED CONFORM STARTER  
INSTALLED AS DETAIL A090

**15** INSTALL SHIMS TO —  
CENTRE DOOR FRAME  
IN ROUGH OPENING

**16**  
FASTEN FRAME WITH  
9.5φx127 FLATHEAD  
EXPANSION ANCHOR  
BOLTS. (3 PER JAMB)

## SILL SECTION

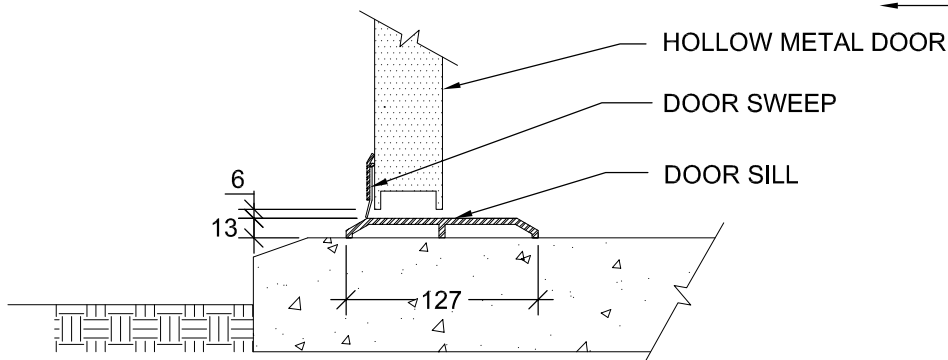

## ROUGH OPENING

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.

DRAWING NO.

A125

COPYRIGHT 2008

SCALE:

1:5

REVISION No.:

R00



**Nuform Building Technologies Inc.**  
1 Regalcrest Court,  
Woodbridge, Ontario, Canada L4L 8P3  
Tel: 905-652-0001 Fax: 905-652-0002  
Toll Free: 1-877-747-9255  
Web Page: [www.nuformdirect.com](http://www.nuformdirect.com)

200mm CF8i WALL-  
HOLLOW METAL DOOR  
EXTERIOR

