

HEADER SECTION

200mm CF8 WALL


NO SEALANT ABOVE FLASHING

FLASHING INSTALLED AS DETAIL A092

25 40
200

17
APPLY SEALANT WITH BACKING ROD ALL AROUND AT EACH SIDE OF DOOR FRAME


HOLLOW METAL DOOR AND FRAME

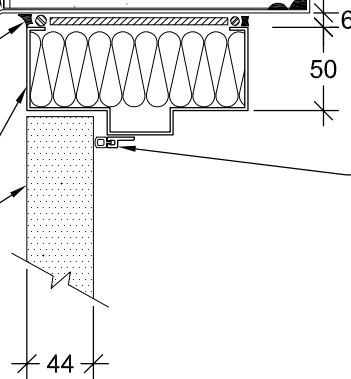

14

APPLY 6mm CORNER BEAD OF SEALANT AT TOP OF STARTER TO FLASHING AT HEADER OF OPENING.

OPENING

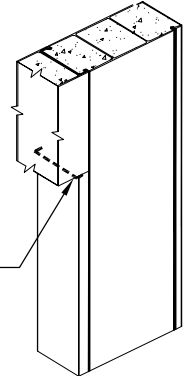


WEATHERSTRIP

UNCORED CONFORM STARTER INSTALLED AS DETAIL A090

15

INSTALL SHIMS TO CENTRE DOOR FRAME IN ROUGH OPENING


JAMB SECTION

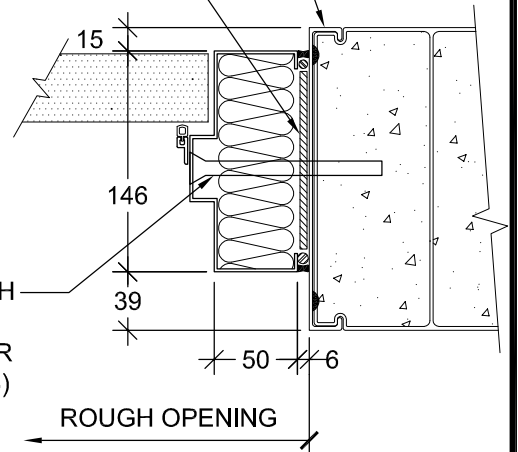

16

FASTEN FRAME WITH 9.5φx127 FLATHEAD EXPANSION ANCHOR BOLTS. (3 PER JAMB)

SILL SECTION

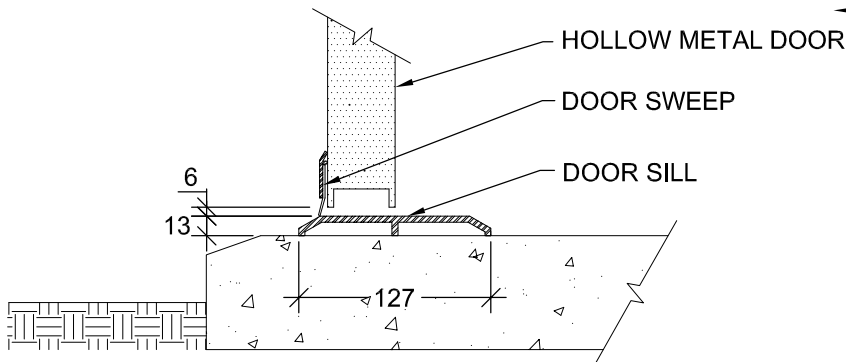

HOLLOW METAL DOOR

DOOR SWEEP

DOOR SILL

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

200mm CF8 WALL-
HOLLOW METAL DOOR
EXTERIOR



DRAWING NO.

A123

COPYRIGHT 2008

SCALE:

1:5

REVISION No.:

R00