


CONCRETE FILLED LINTEL
(20MPa [3000 psi] MINIMUM)

ERECTION SCREWS

VERTICAL AND HORIZONTAL
REINFORCEMENT AS SPECIFIED
ON STRUCTURAL DRAWINGS

CORING TO BE ALIGNED IN
LINTEL AND IN FULL HEIGHT
COMPONENTS ($\pm 5\text{mm}$ [$\frac{1}{4}$ "])

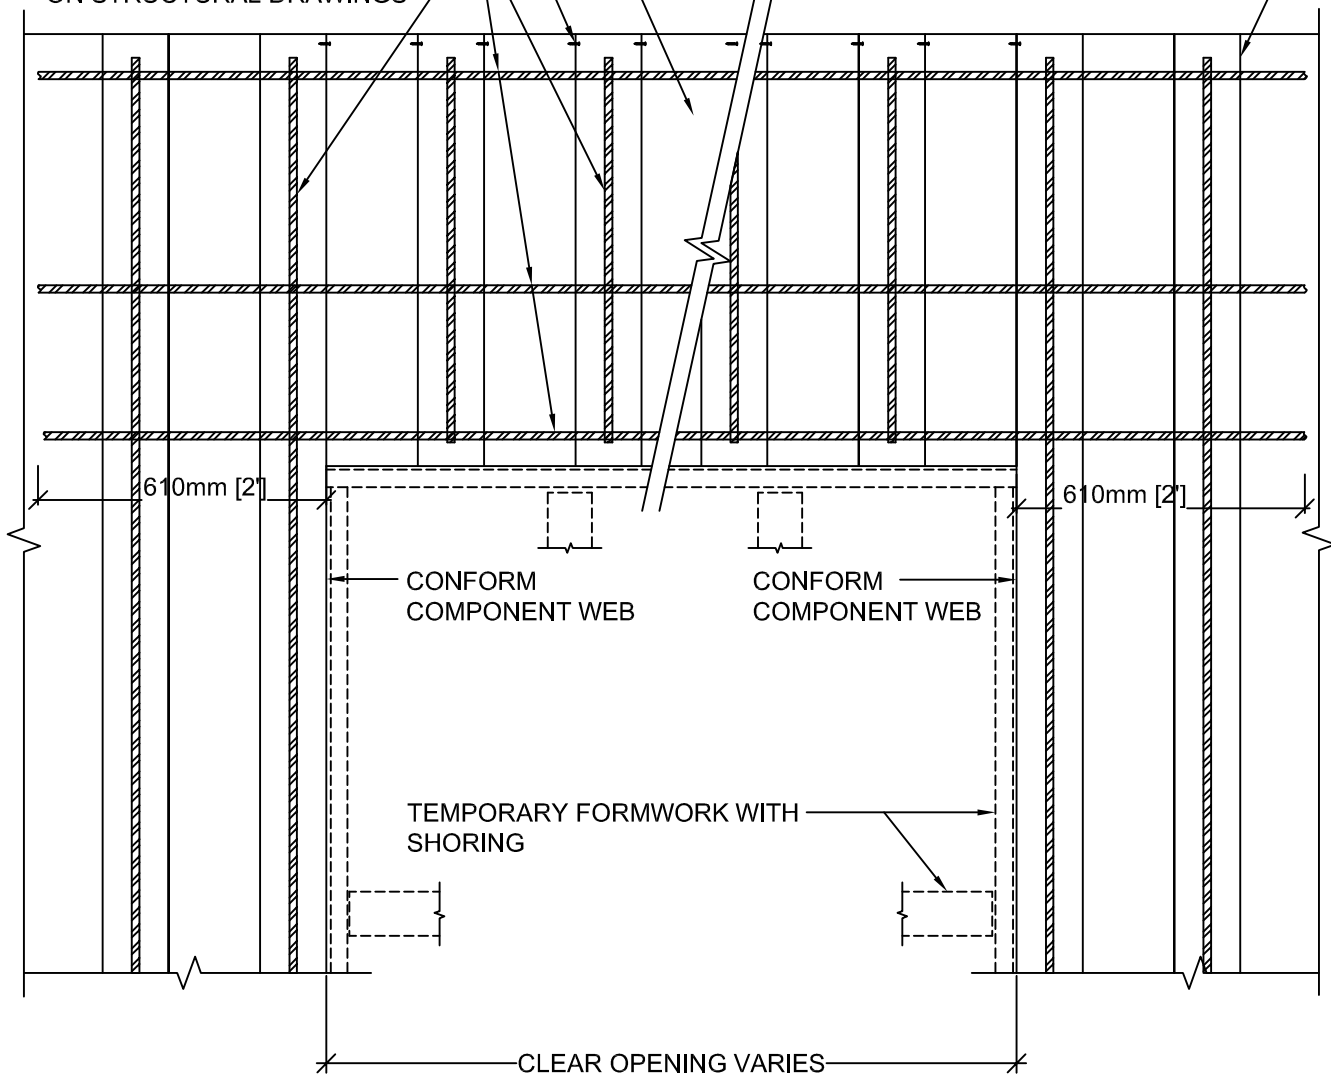

NOTE :
BARS SHALL BE EXTENDED INTO WALLS AT EACH END AFTER HEADER
SECTION IS IN FINAL POSITION AND PRIOR TO POURING CONCRETE

- DETAIL FOR FORMWORK ONLY
- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST
BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL
ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
100 Galcat Drive, Unit #2,
Woodbridge, Ontario, Canada L4L 0B9
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

CONFORM WALL - REINFORCED CONCRETE HEADER ELEVATION



DRAWING NO.	
T240	
COPYRIGHT 2024	
SCALE:	REVISION No.:
	R00