

PREPAINTED ALUMINUM OR GALVANIZED STEEL FLASHING IN $\frac{1}{8}$ "x2" DEEP REGLET SAWCUT INTO FACE OF CONFORM

NO SEALANT ABOVE FLASHING

#6x1" PAN HEAD STAINLESS STEEL 18/8 SCREWS WITH NEOPRENE WASHERS AT 2'-2" o/c MAX THRU LEGS OF BOX CONNECTORS


CONTINUOUS SEALANT UNDER DRIP

MASONRY TIES WITH CONCRETE SCREWS, AS REQUIRED

MASONRY VENEER

AIR SPACE

8" CF8i WALL

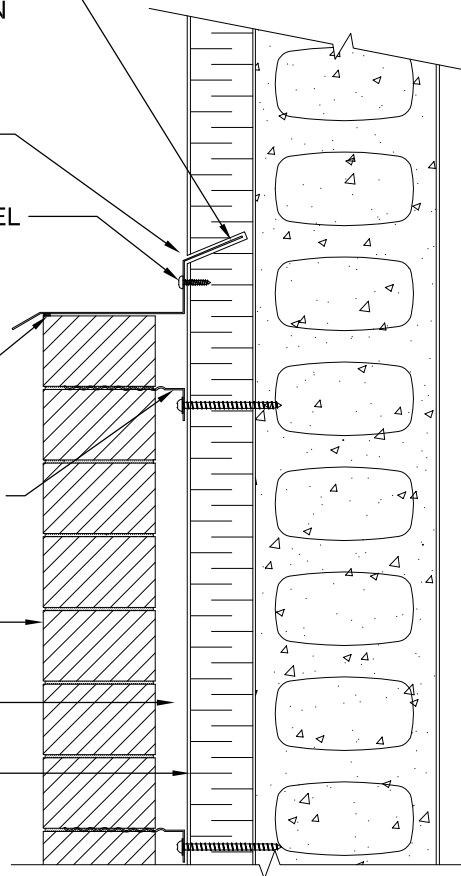

- DETAIL FOR FORMWORK ONLY

- ALL DETAILS, REINFORCING STEEL & CONCRETE MUST BE DESIGNED & CONFIRMED BY PROJECT STRUCTURAL ENGINEER AND / OR PROJECT ARCHITECT.



Nuform Building Technologies Inc.
1 Regalcrest Court,
Woodbridge, Ontario, Canada L4L 8P3
Tel: 905-652-0001 Fax: 905-652-0002
Toll Free: 1-877-747-9255
Web Page: www.nuformdirect.com

8" CF8i WALL -
BRICK VENEER



DRAWING NO.

A335

COPYRIGHT 2008

SCALE:

2":1'

REVISION No.:

R00